

Low Voltage Variable Frequency Drive

Range: 0.2 kW to 15 kW

WJ200N Series

Low Voltage Drive



Most Energy Efficient Means of Process Control

Industry Leading Performance

High starting torque of 200% or greater achieved using sensorless vector control

(when sized for heavy duty)

Sensorless vector control allows for the realisation of high torque required for applications such as cranes, hoist, lifts etc.

Auto-tuning function makes the implementation of sensorless vector control easy and effective.


Dual Rating

Trip avoidance functions WJ200N can be used for both heavy and normal duty. One-frame-size smaller WJ200N can be applicable to certain applications.


Trip Avoidance Functions

Minimum time deceleration function, over-current suppression and DC bus AVR functions are included as standard. These functions increase the robustness of the product and help to avoid unnecessary tripping. Improved torque limiting/current limiting function enables a load restriction to protect machinery and equipment.

Example of Torque Characteristics

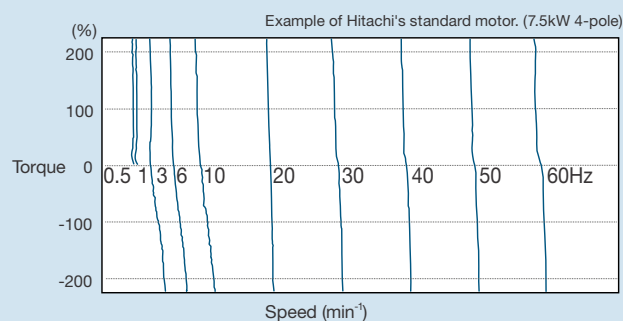


Minimum time deceleration Function

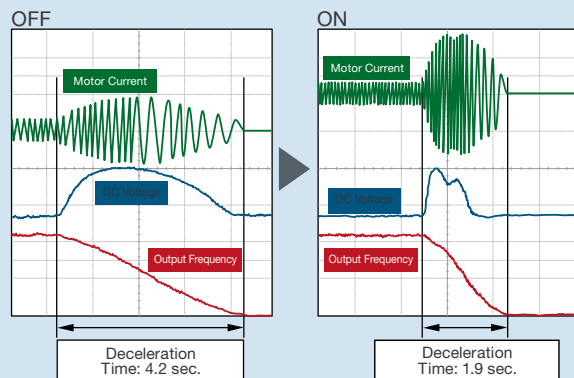

2.3 sec. reduction of deceleration time without a braking resistor can be achieved when the function is active.

Over-current Suppression Function*

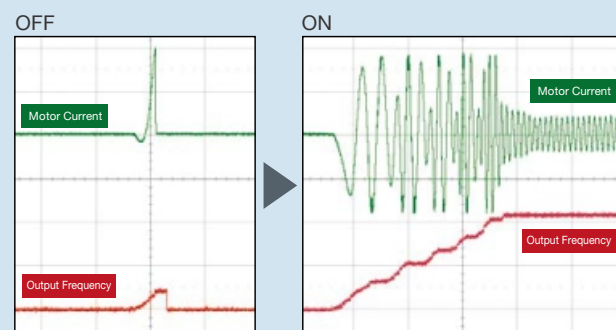

*Turn off this function for lifting equipment.

Model Name Indication

WJ200N - 002 H F

Series Name

Applied Motor Capacity
002: 0.2kW - 150: 15kW

Power Source
S: 1-phase 200V class
H: 3-phase 400V class


with Digital Operator



Simple Positioning Control


(in combination with a feedback signal)

When simple positioning function is activated, speed control operation or positioning control operation is selectable via intelligent input. While the [SPD] input is ON, the current position counter is held at 0. When [SPD] is OFF, the inverter enters positioning control operation and the position counter is active.

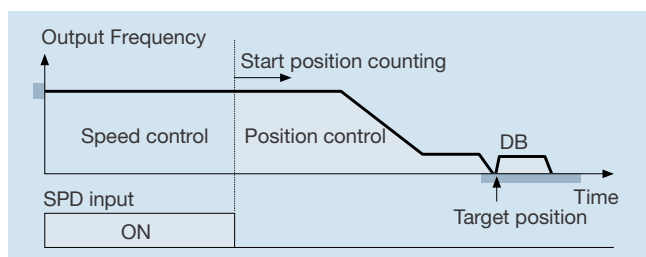

Induction motor & Permanent magnet motor* control with one inverter series

The WJ200N inverter can be used to drive both induction motors (IM) and permanent magnetic motors (PM). PM motors are energy efficient and make effective use of available space.

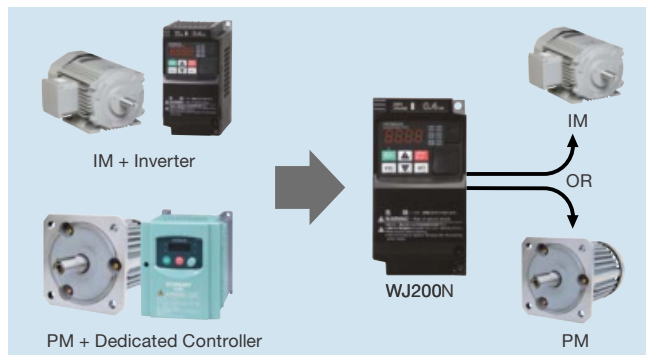

Model Line-up

Model Name		
WJ200N-xxx		
3-phase 400V class		
	VT	CT
002		
004	0.75	0.4
007	1.5	0.75
015	2.2	1.5
022		
030	4.0	3.0
040	5.5	4.0
055	7.5	5.5
075	11	7.5
110	15	11
150	18.5	15



Ease of Maintenance

Long life time for wearing parts

Design lifetime 10 Years or more* for DC bus capacitors and cooling fan.

Cooling fan ON/OFF control function for longer fan life.


*Ambient temperature: Average 40°C (no corrosive gases, oil mist or dust) Design lifetime is calculated, and not guaranteed.

Life time warning function

WJ200N diagnoses lifetime of DC bus capacitors and cooling fan(s).

Easy to remove cooling fan

The cooling fan can be exchanged without special tools.

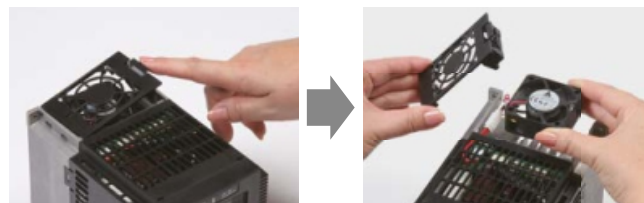

Top cover can be removed with fingertips.

Remove cooling fan simply by disconnecting the power plug.



Ease of Use

Easy sequence programming function [EzSQ]

Logic operations can be realised within the inverter using Hitachi's EzSQ software without the need for external relays or a PLC. User programs are compiled using a PC program which are then downloaded to the drive.


EzSQ Application Example: Energy saving through speed reduction on a spinning machine.

- Daytime: Motor speed is automatically reduced to reduce demand during peak hours.
- Night-time: Motor speed is increased to take an advantage of off-peak power rates. Average productivity is maintained.

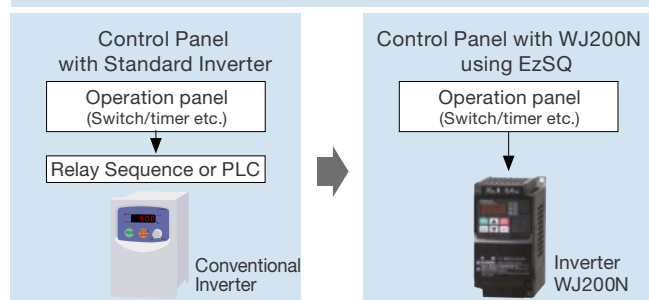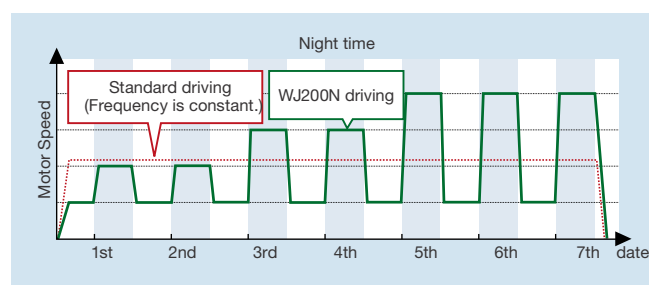

Safety stop function

WJ200N conforms to the applicable safety standards and corresponds to Machinery Directive of Europe. Inverter is shut down via hardware, bypassing the CPU, achieving a reliable safe stop function. (ISO13849-1 Category 3/IEC60204-1 Stop Category 0)

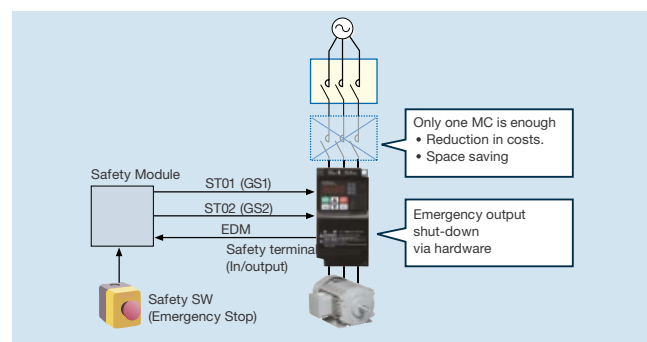

Password function

The WJ200N inverter has a password function to prevent changing parameters or to hide some or all parameters.

Global standards

Conformity to global standards

CE, UL, c-UL, c-Tick approvals.



Sink / source logic is standard

Logic input and output terminals can be configured for sink or source logic

Environmental Friendliness

EU RoHS compliant

Long life time for wearing parts Environment-friendly inverter meets RoHS requirements


Improvement of environment

Varnish coating of internal PC board is standard. (Logic PCB and I/F PCB are excluded.)

Network compatibility & External ports

USB (Mini-B connector) port and RS422 (RJ45 connector) port are available as standard.

Modbus/RTU serial communication is available as standard. The WJ200N can also be connected to various other fieldbus systems via an optional expansion card.

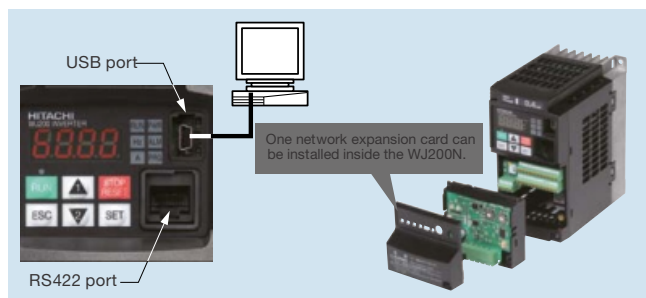

Ease of wiring

Screw-less terminals (control circuit terminals) spring-loaded, for use with solid or stranded wire with ferrules. Screw-less terminals (Control circuit terminals)



Various Versatile Functions

Output monitoring (2 terminals)

Two programmable output terminals (Analog 0 ~ 10VDC (10-bit), pulse train (0 ~ 10VDC, max 32kHz)) can be used to monitor items such as frequency, motor current etc.

Watt-hour monitor

Energy consumption is displayed in kWh.

Built-in BRD circuit

Built-in braking resistor control circuit as standard in all models (Resistor optional).

Micro surge voltage suppress function

Hitachi original PWM control method limits motor terminal voltage to less than twice inverter DC bus voltage. (During regeneration, the motor terminal voltage may exceed the motor maximum insulation voltage.)

Easy to configure

Various display modes for easy selection of displayed parameters

- Basic display
Display most frequently used parameters.
- Data comparison function
Display parameters changed from default setting.
- Quick display
Display 32 user-selected parameters.
- Change history
Store and display the most recent parameters changed by the user (Up to 32 items).
- Active parameter display
Display those parameters which are enabled.

Side-by-side installation

Inverters can be installed with no space between them to save space in the panel.

*Ambient temperature 40°C max., individual mounting.



EzCOM (Peer-to-Peer communication)

WJ200N supports Peer-to-Peer communication between multiple inverters using the built-in RS485 port. One administrator inverter is necessary in the network, and the other inverters act as master or slave.

Flexible display functions

Automatic return to the initial display :

10 min. after the last key operation, display returns to the initial parameter set.

Display limitation:


Show only the contents of display parameter.

Dual monitor:

Two arbitrary monitor items can be set. Parameters are selected via the UP/DOWN keys.

Connecting Diagram

Source Type Logic

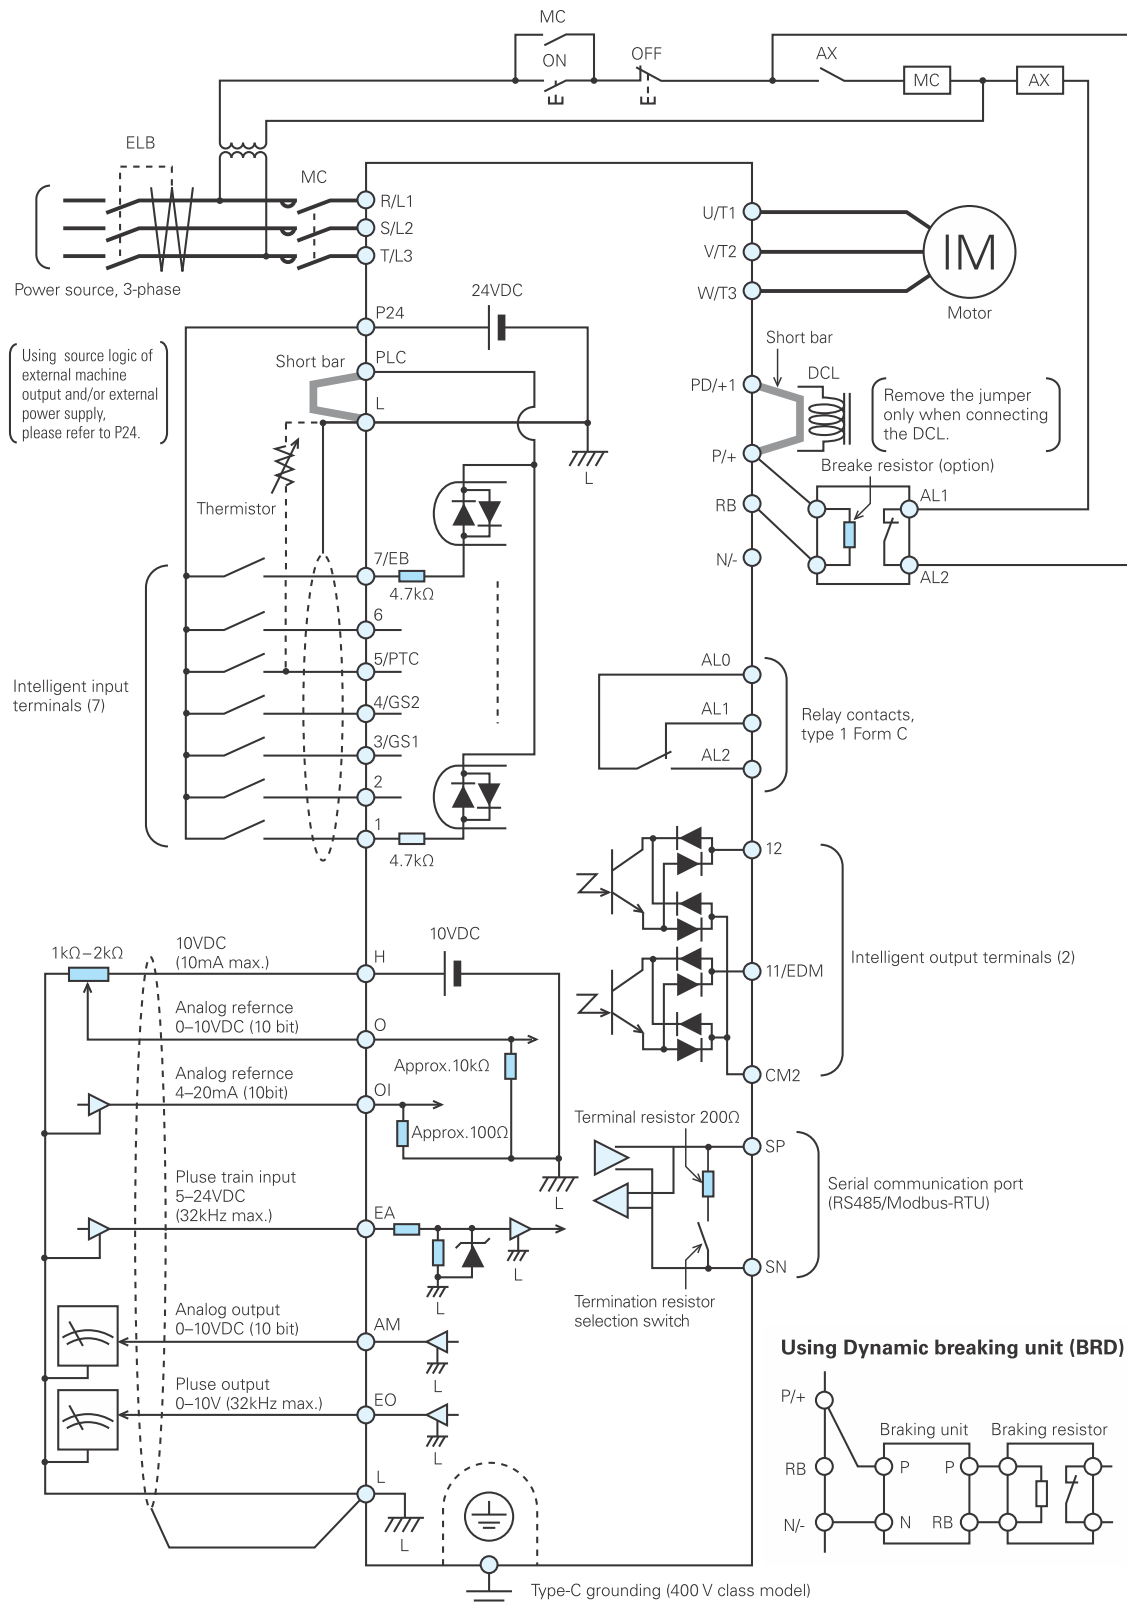

Standard Specifications


3-phase 400V class

Models WJ200N			004HF	007HF	015HF	022HF	030HF	040HF	055HF	075HF	110HF	150HF
Applicable motor size	kW	VT	0.75	1.5	2.2	3.0	4.0	5.5	7.5	11	15	18.5
		CT	0.4	0.75	1.5	2.2	3.0	4.0	5.5	7.5	11	15
Rated capacity (kVA)	380V	VT	1.3	2.6	3.5	4.5	5.7	7.0	11.5	15.1	20.4	25.0
		CT	1.1	2.2	3.1	3.6	4.7	6.0	9.7	11.8	15.7	20.4
	480V	VT	1.7	3.4	4.4	5.7	7.3	9.2	4.5	19.1	25.7	31.5
		CT	1.4	2.8	3.9	4.5	5.9	7.6	12.3	14.9	19.9	25.7
Input Rating	Rated input voltage (V)		3-phase: 380V-15% to 480V +10%, 50 / 60Hz ±5%									
	Rated input current (A)	VT	2.1	4.3	5.9	8.1	9.4	13.3	20.0	24.0	38.0	44.0
		CT	1.8	3.6	5.2	6.5	7.7	11.0	16.9	18.8	29.4	35.9
Output Rating	Rated output voltage (V)		3-phase: 380 to 480V (proportional to input voltage)									
	Rated output current (A)	VT	2.1	4.1	5.4	6.9	8.8	11.1	17.5	23.0	31.0	38.0
		CT	1.8	3.4	4.8	5.5	7.2	9.2	14.8	18.0	24.0	31.0
Minimum value of resistor (Ω)			180	180	180	100	100	100	70	70	70	35
Weight		kg	1.5	1.6	1.8	1.9	1.9	2.1	3.5	3.5	4.7	5.2


VT normal duty / CT heavy duty

Dimensions


• WJ200N-055HF • WJ200N-075HF

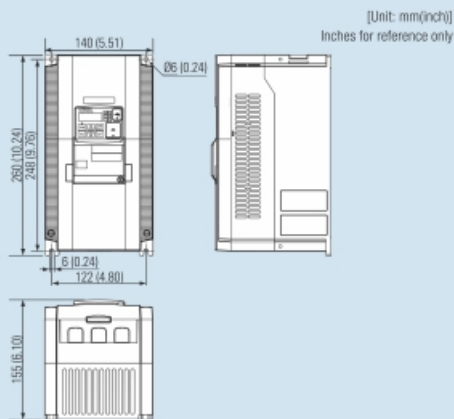


• WJ200N-004HF-030HF

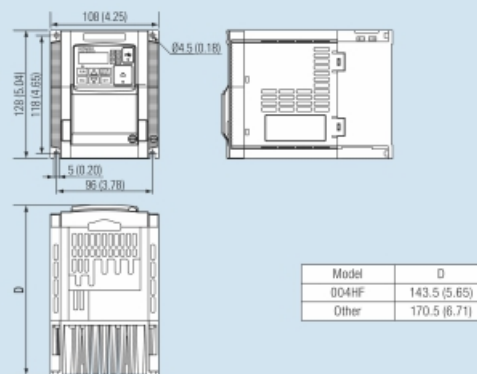

• WJ200N-110HF • WJ200N-150HF

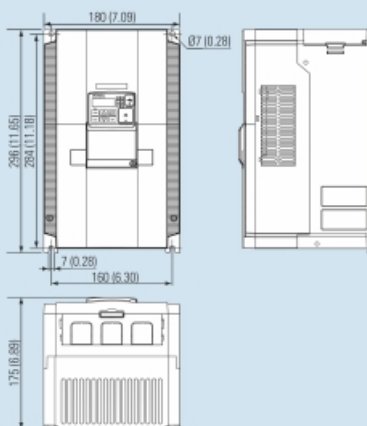

• WJ200N-040HF

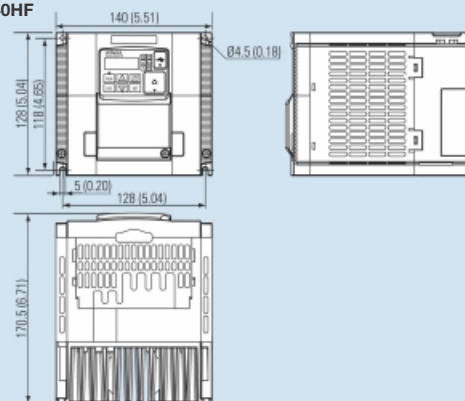

General Specifications

Item			General Specifications	
Protective housing			IP20	
Control method			Sinusoidal Pulse Width Modulation (PWM) control	
Carrier frequency			2kHz to 15kHz (derating required depending on the model)	
Output frequency range			0.1 to 400Hz	
Frequency accuracy			Digital command: ±0.01% of the maximum frequency Analog command: ±0.2% of the maximum frequency (25°C ±10°C)	
Frequency setting resolution			Digital: 0.01Hz; Analog: max. frequency / 1000	
Volt. / Freq. characteristic			V / F control (constant torque, reduced torque, free-V / F): base freq. 30Hz – 400Hz adjustable, Sensorless vector control, Closed loop control with motor encoder feedback (only V / F control).	
Overload capacity			Dual rating: CT (Heavy duty): 60 sec. @150% VT (Normal duty): 60 sec. @120%	
Acceleration/deceleration time			0.01 to 3600 seconds, linear and S-curve accel / decel, second accel / decel setting available	
Starting torque			200% @0.5Hz (sensorless vector control)	
DC braking			Variable operating frequency, time, and braking force	
Freq. setting		Operator panel	△▽ keys / Value settings	
		External signal	0 to 10 VDC (input impedance 10kΩ), 4 to 20mA (input impedance 100Ω), Potentiometer (1k to 2kΩ, 2W)	
		Via network	RS485 ModBus RTU, other network option	
FWD / REV run		Operator panel	Run / Stop (Forward / Reverse run change by command)	
		External signal	Forward run / Stop, Reverse run / stop	
		Via network	RS485 ModBus RTU, other network option	
Input signal	Intelligent input terminal	Terminals	7 terminals, sink / source changeable by a short bar	
		Functions	68 functions assignable to each terminal (for the details, refer to the instruction manual)	
	Pulse train input		2 terminal, 2 / 32kHz max. (one terminal is common with intelligent terminal [7])	
	Thermistor input		1 terminal (PTC characteristic, common with intelligent terminal [3])	
Output signal	Intelligent output terminal	Terminals	2 open-collector terminal, NO / NC switchable, sink logic	
		Functions	48 functions assignable to each terminal	
	Monitor output (analog)	Terminals	1 terminal, 0 to 10VDC	
		Functions	Output freq., output current, output torque, output voltage, input power, thermal load ratio, LAD freq., heat sink temperature, general output (EzSQ)	
	Pulse train output	Terminals	1 terminal, 0-10VDC, 32kHz max.	
		Functions	[PWM output] Output freq., output current, output torque, output voltage, input power, thermal load ratio, LAD freq., heat sink temperature, general output (EzSQ) [Pulse train output] Output frequency, output current, pulse train input monitor	
Alarm output contact (relay)			ON for inverter alarm (1c contacts, both normally open or closed available.)	
Other functions			Free-V / F, manual / automatic torque boost, output voltage gain adjustment, AVR function, reduced voltage start, motor data selection, auto-tuning, motor stabilization control, reverse running protection, simple position control, simple torque control, torque limiting, automatic carrier frequency reduction, energy saving operation, PID function, non-stop operation at instantaneous power failure, brake control, DC injection braking, dynamic braking (BRD), frequency upper and lower limiters, jump frequencies, curve accel and decel (S, U, inversed U,EL-S), 16-stage speed profile, fine adjustment of start frequency, accel and decel stop, process jogging, frequency calculation, frequency addition, 2-stage accel / decel, stop mode selection, start / end freq., analog input filter, window comparators, input terminal response time, output signal delay / hold function, rotation direction restriction, stop key selection, software lock, safe stop function, scaling function, display restriction, password function, user parameter, initialization, initial display selection, cooling fan control, warning, trip retry, frequency pull-in restart, frequency matching, overload restriction, over current restriction, DC bus voltage AVR	
Protective function			Over-current, over-voltage, under-voltage, overload, brake resistor overload, CPU error, memory error, external trip, USP error, ground fault detection at power on, temperature error, internal communication error, driver error, thermistor error, brake error, safe stop, overload at low speed, modbus communication error, option error, encoder disconnection, speed excessive, EzSQ command error, EzSQ nesting error, EzSQ execution error, EzSQ user trip	
Operating environment	Temperature	Operating (ambient): -10 to 50°C / Storage: -20 to 65°C		
	Humidity	20 to 90% humidity (non-condensing)		
	Vibration	5.9m/s ² (0.6G), 10 to 55 Hz		
	Location	Altitude 1,000m or less, indoors (no corrosive gasses or dust)		
Coating color			Black	
Options			Remote operator unit, cables for the units, braking unit, braking resistor, AC reactor, DC reactor, EMC filter	

Serving Entire Gamut of Industries

We have rich experience in supplying power electronics products for mission critical applications in various industries for critical data processing applications and back-up technology for demanding applications.



Food and Beverages

- Compressor
- HVAC
- Packing




Solar

- Pump
- Tracker



Steel & Mining

- Fan
- Ball mill
- Pump
- Conveyors
- Crane
- Wire Drawn Machine
- Roller Table
- Crusher
- Vibro Feeder

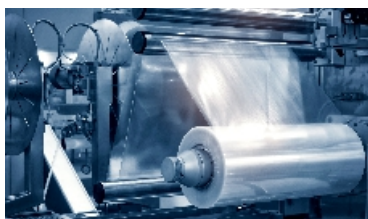

Plastic

- Extruder
- Compressor
- Injection moulding
- Tape Line Machin



Oil & Gas

- Pump
- Compressor
- Fan



Power

- ID Fan, FD Fan, PA Fan
- Pump
- Compressor
- Conveyors
- Cooling Tower



Textile

- Ring frame
- Compressor
- Spinning mill
- Winder
- Cooling fan
- Doubling machine
- Stenter Machine



Ceramic

- Ball mill & Blunger
- Compressor
- Spray dryer blower
- Kiln blowers
- Agitator motor
- Hydraulic press
- Conveyors



Chemical Industry

- Centrifugal pump
- Compressor
- Fan
- Agitator



Pulp & Pape

- Pump
- Dryer
- Pop Reel
- Press
- Sectional Roll
- Rewinder
- Refiner
- Pulper



Cement

- Fan
- Mixture
- Ball mill
- Crusher
- Conveyors
- Kiln



Water

- Centrifugal pump
- Submersible pump
- and many more...

About Hitachi Hi-Rel Power Electronics

Founded & established in 1983 as Hi-Rel Electronics Pvt. Ltd., which later on in year 2015 had become the 100% subsidiary company of Hitachi, Japan which is one of the Global fortune 500 companies with a new name as Hitachi Hi-Rel Power Electronics Private Limited, which is being recognized as one of the pioneers in power electronics domain. Hitachi Hi-Rel, today, is a leading manufacturer of Industrial UPS, IT & Infra UPS, Medium & Low Voltage Variable Frequency Drives, Grid Tied Solar Inverters, Air Compressors and Railway Inverters.

Hitachi Hi-Rel has state-of-the art manufacturing facility at Sanand near Ahmedabad in Gujarat-India. Hitachi Hi-Rel is helping a wide array of industries and organizations to meet the mission critical demands through technologically superior, low polluting and innovative products Solutions and continue to offer world class power electronics products, value added services & customized solutions.

With a vision of “To be recognized as the most trusted Power Electronics Company by supplying superior products and services”, Hitachi Hi-Rel has garnered a significant level of trust in Indian power electronics market segment wherein it serves the entire gamut of Industries, particularly in mission critical applications for Refineries, Petro-Chemicals, Power Generation, Steel & Metals, and Process Industries as well as Critical Data Processing Applications. Besides offering greater energy efficiency & lower carbon footprint, each of the company product streams bears the hallmark of excellence with company accreditations. Hitachi Hi-Rel is an ISO 9001:2015, ISO 14001:2015 & ISO 45001:2008 certified company having export house status. Hitachi Hi-Rel sales network & service infrastructure expands out to the world & with this network, we have made strong inroad in Global markets like South East Asia, Middle East, Africa and Brazil. Also, with a presence of strategically located skilled service engineers in India helps us to score high in terms of customer expectations on service deliverables & uptime of the product.

Hitachi Hi-Rel's UPS and power conditioning back-up systems, the flagship product, works as an exceptional safeguard against power disruption and reflects the industry's ultimate in advanced technology with proven track record in mission critical applications. Its variable frequency drives represent the most energy efficient means of process control and reflect the best in


process control. Hitachi Hi-Rel's Grid Tied Solar Inverters are based on the contemporary technology of Hitachi Ltd, Japan. Currently Hitachi branded Solar Inverters are generating more than 5.5 GW renewable power in Global Solar Domain as well as more than 3 GW+ renewable power in Indian Solar Domain.

Sprawling across an area of 26,000 sq. meter and modelled on Hitachi's Omika Works in Japan, Hitachi Hi-Rel's Sanand manufacturing works is the world class and one of the most modern power electronics manufacturing facility in India. All aspects of manufacturing, testing and quality assurance are supported by highly experienced Japanese Expats stationed at the facility. Sanand Works employs Hitachi Omika Works (Japan) based software tools for engineering and manufacturing and has one of the most advanced product testing facilities in the country. Innovation through research & development has been rooted in its DNA. Hitachi Hi-Rel also has an additional facility at Gandhinagar near Ahmedabad in Gujarat which is sprawled across an area of 5,000 sq. meter. Its new products are developed by the R&D team which are on par with global standards. Along with indigenisation of products from Hitachi, original design of UPS and railway products are done regularly by the in-house R&D team.

With expertise, experience and an efficient product line, Hitachi Hi-Rel will always try to be your power electronics partner. When you choose to do business with Hitachi Hi-Rel, you are partnering with a company who cares.



Worldwide Presence

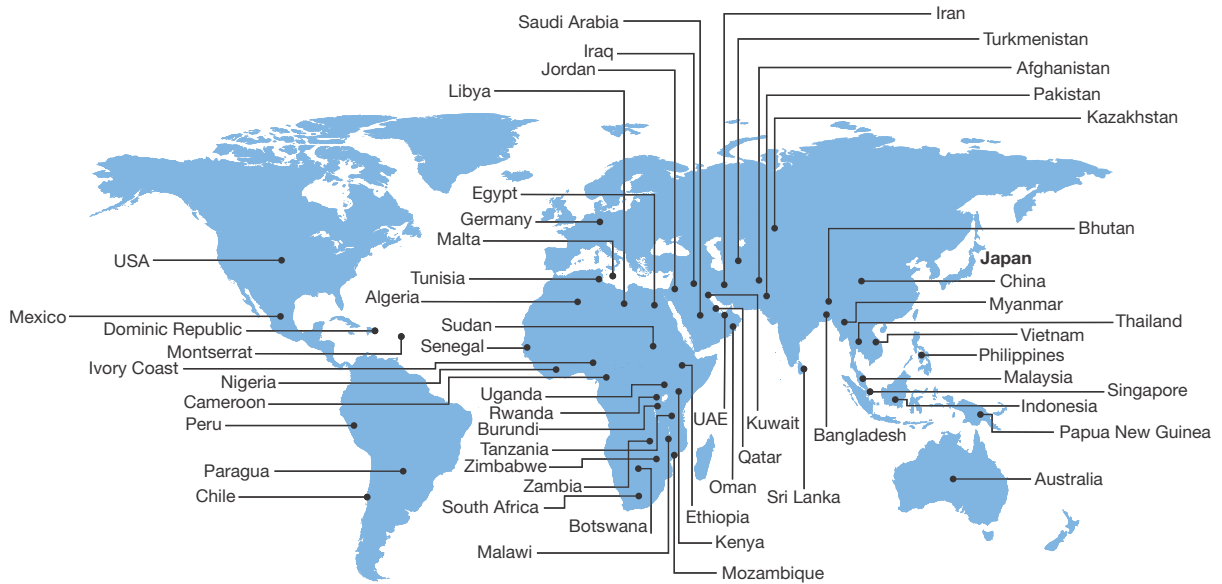

Pan India Presence



Contact us

Hitachi Hi-Rel Power Electronics Private Limited

Registered Office:

B-52, Corporate House,
Near Judges Bungalow, Bodakdev,
Ahmedabad - 380 054, Gujarat, India.
Tel: +91-79-6604 6200,
Fax: +91-79-6604 6243

 /company/hitachihirel

 /hitachihirelindia


 /hitachihirel

Manufacturing Works:

Plot No. SM 3 & 4, Sanand GIDC - II,
Industrial Estate, Bol Village,
Sanand - 382 110, Gujarat, India.
Tel: +91-2717-678 777,
Fax: +91-2717-678 700

Gandhinagar Facility:

B - 14/1 & 171, GIDC Electronics Zone,
Sector - 25, Gandhinagar - 382 028,
Gujarat, India.
Tel: +91-79-6170 0500

 **Helpline No.:** (080) 6112 0800 (For Sales & Service)

 contact@hitachi-hirel.com

 www.hitachi-hirel.com



e-gallery